


NOTE:
USING ANCHORLIFT BOW ROLLER
ON FX ANCHORS,
UPPER ROLLER MUST BE REMOVED
AND LOWER ROLLER MUST BE MOVED
TO CENTER POSITION. BOLTS ARE
SECURED WITH LOCTITE, APPLY
HEAT TO BOLT TO MAKE LOCTITE LOOSEN.

LTR	DESCRIPTION	DATE	APPROVED
A		9/16/25	

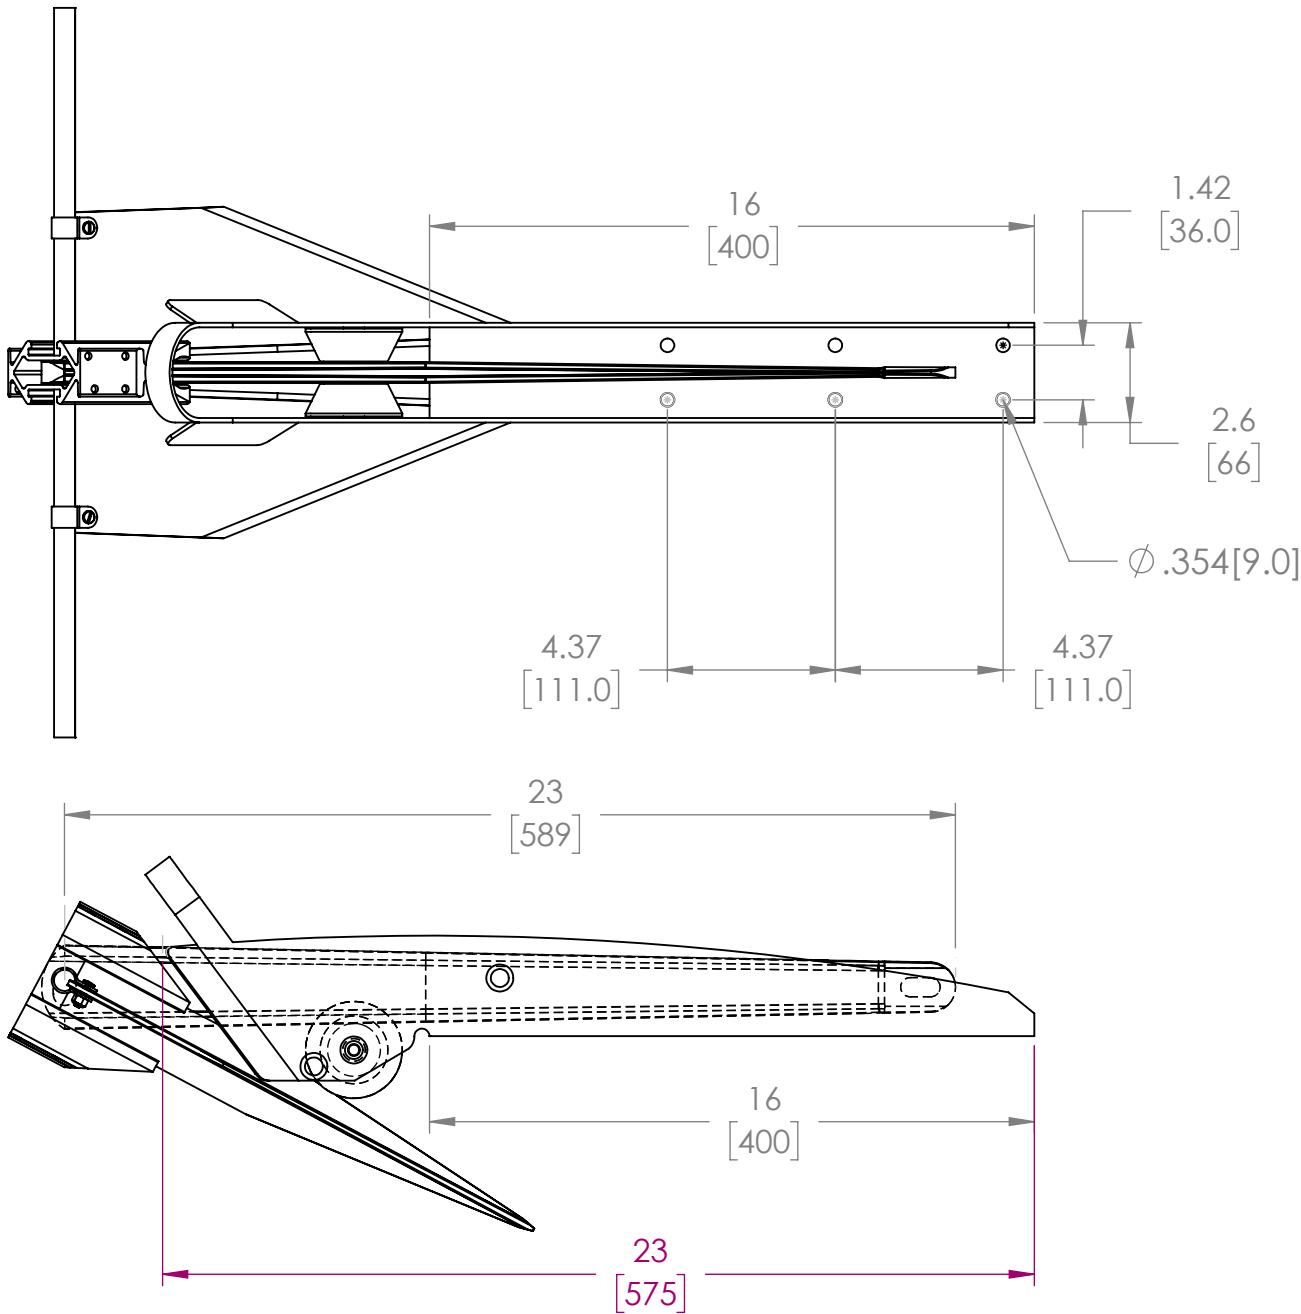

MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES/[MM] .XXX .XX ANGLES ± ± ± 1/2			ANCHORLIFT WINDLASS SYSTEMS	
				FORTRESS MARINE ANCHORS	
FINISH				TITLE ANCHORLIFT 90126 FORTRESS FX7	
DO NOT SCALE DRAWING	DRAWN BY	DATE	SIZE A	DWG. NO. 90126 - FX7	REV. A
	CHECKED	-	SCALE:1:5	SHEET 1 OF 1	