
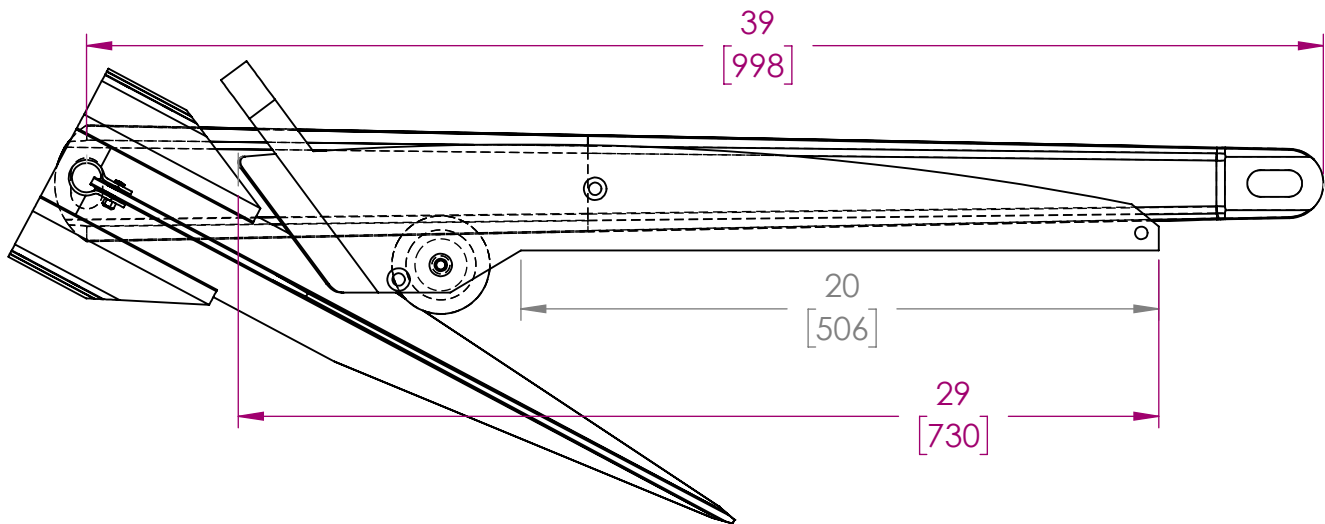


NOTE:
USING ANCHORLIFT BOW ROLLER
ON FX ANCHORS,
UPPER ROLLER MUST BE REMOVED
AND LOWER ROLLER MUST BE MOVED
TO CENTER POSITION. BOLTS ARE
SECURED WITH LOCTITE, APPLY
HEAT TO BOLT TO MAKE LOCTITE LOOSEN.

LTR	DESCRIPTION	DATE	APPROVED
A		9/16/25	

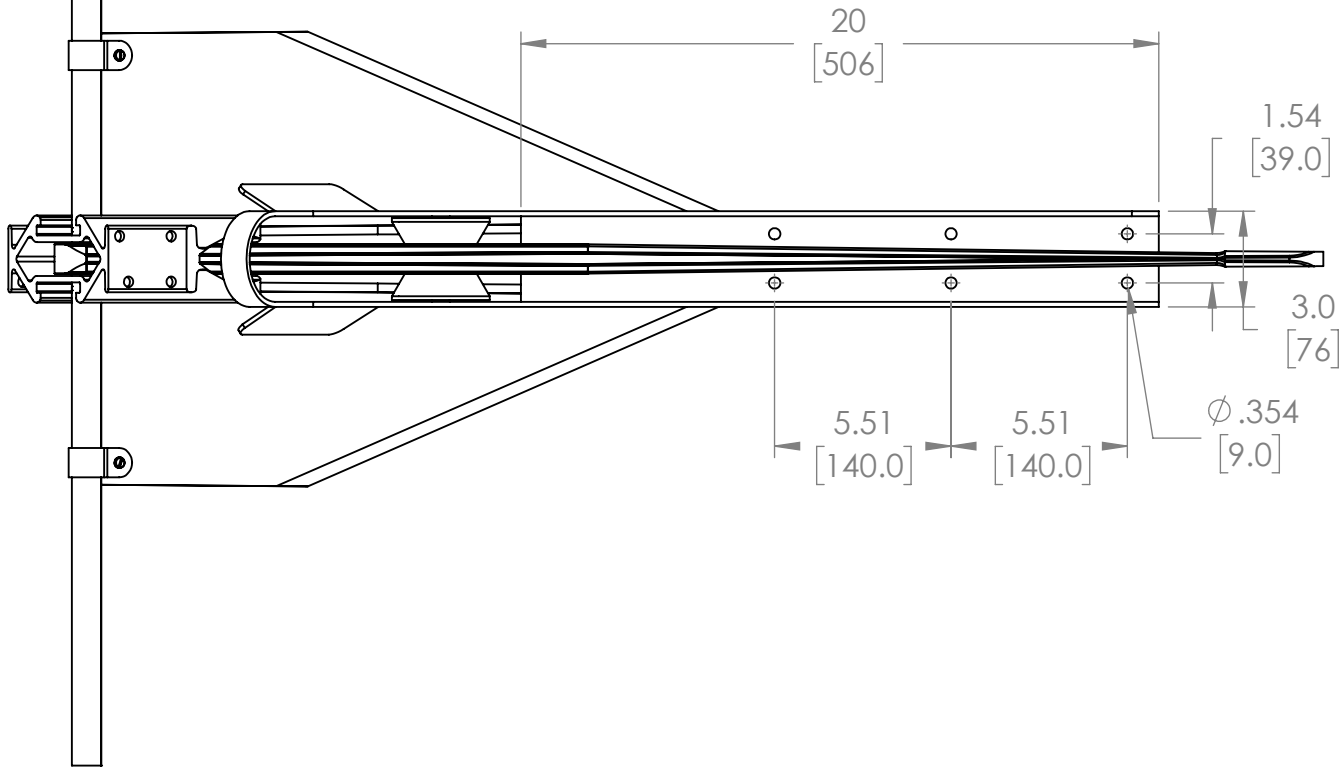

MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES/[MM] .XXX .XX ANGLES ± ± ± 1/2					
						
FINISH				TITLE ANCHORLIFT 90127 FORTRESS FX37		
	DRAWN BY		DATE	SIZE A	DWG. NO. 90127-FX37	REV. A
DO NOT SCALE DRAWING	CHECKED		-	SCALE:1:6		SHEET 1 OF 1
			-			