
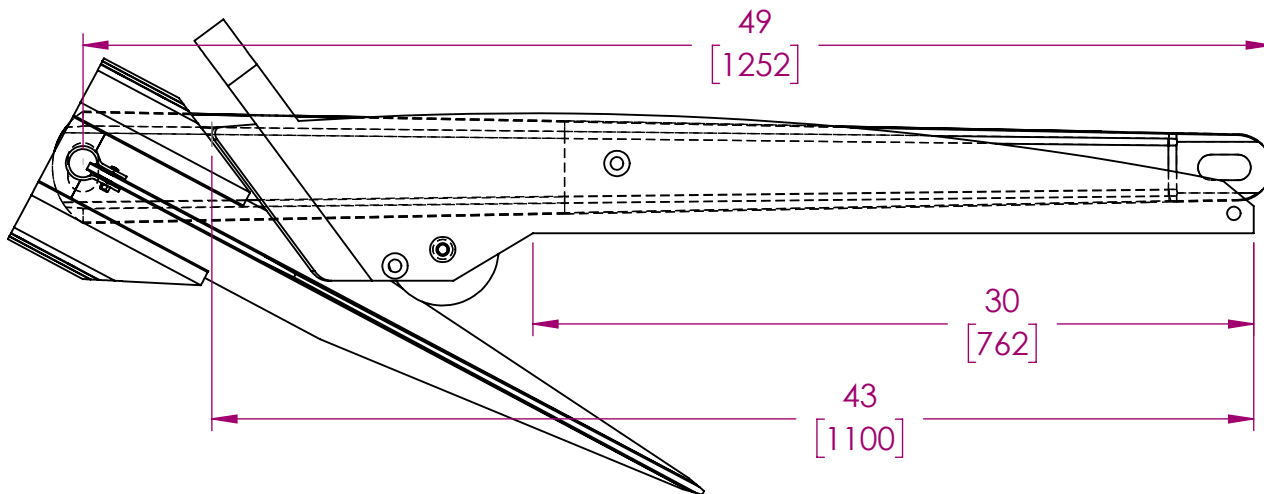


NOTE:
 USING ANCHORLIFT BOW ROLLER
 ON FX ANCHORS,
 UPPER ROLLER MUST BE REMOVED
 AND LOWER ROLLER MUST BE MOVED
 TO CENTER POSITION. BOLTS ARE
 SECURED WITH LOCTITE, APPLY
 HEAT TO BOLT TO MAKE LOCTITE LOOSEN.

LTR	DESCRIPTION	DATE	APPROVED
A		9/16/25	

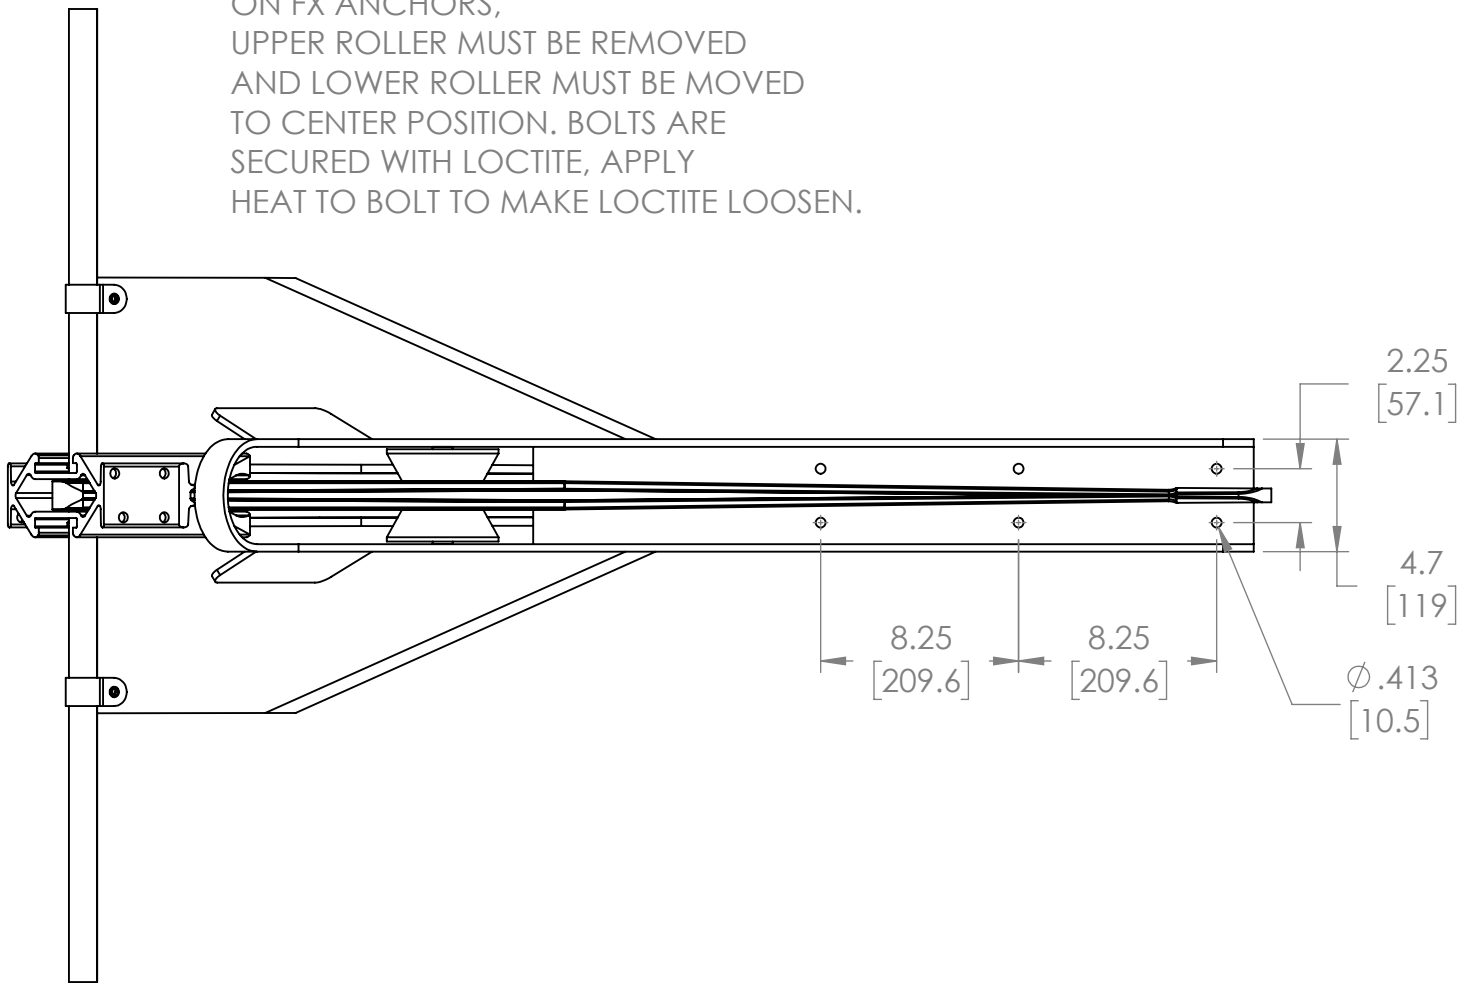

MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES/[MM] .XXX .XX ANGLES ± ± ± 1/2			ANCHORLIFT WINDLASS SYSTEMS	
				FORTRESS MARINE ANCHORS	
FINISH				TITLE ANCHORLIFT 90129 FORTRESS FX85	
				SIZE DWG. NO. 90129-FX85	
DO NOT SCALE DRAWING	DRAWN BY		DATE	SCALE: 1:8	REV. A
	CHECKED -		-		SHEET 1 OF 1