
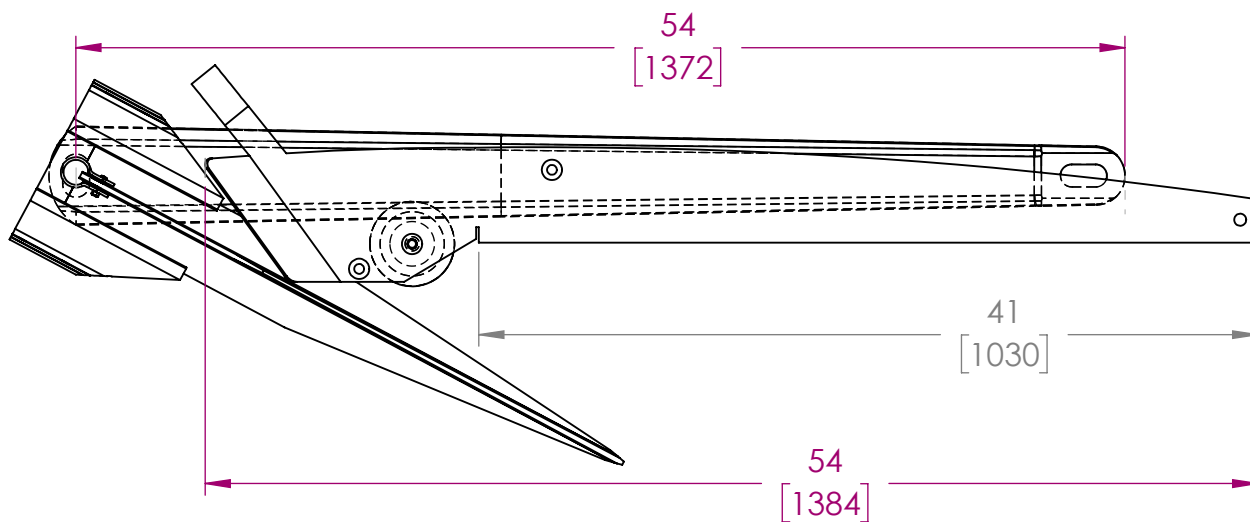


NOTE:  
 USING ANCHORLIFT BOW ROLLER  
 ON FX ANCHORS,  
 UPPER ROLLER MUST BE REMOVED  
 AND LOWER ROLLER MUST BE MOVED  
 TO CENTER POSITION. BOLTS ARE  
 SECURED WITH LOCTITE, APPLY  
 HEAT TO BOLT TO MAKE LOCTITE LOOSEN.

LTR	DESCRIPTION	DATE	APPROVED
A		9/16/25	

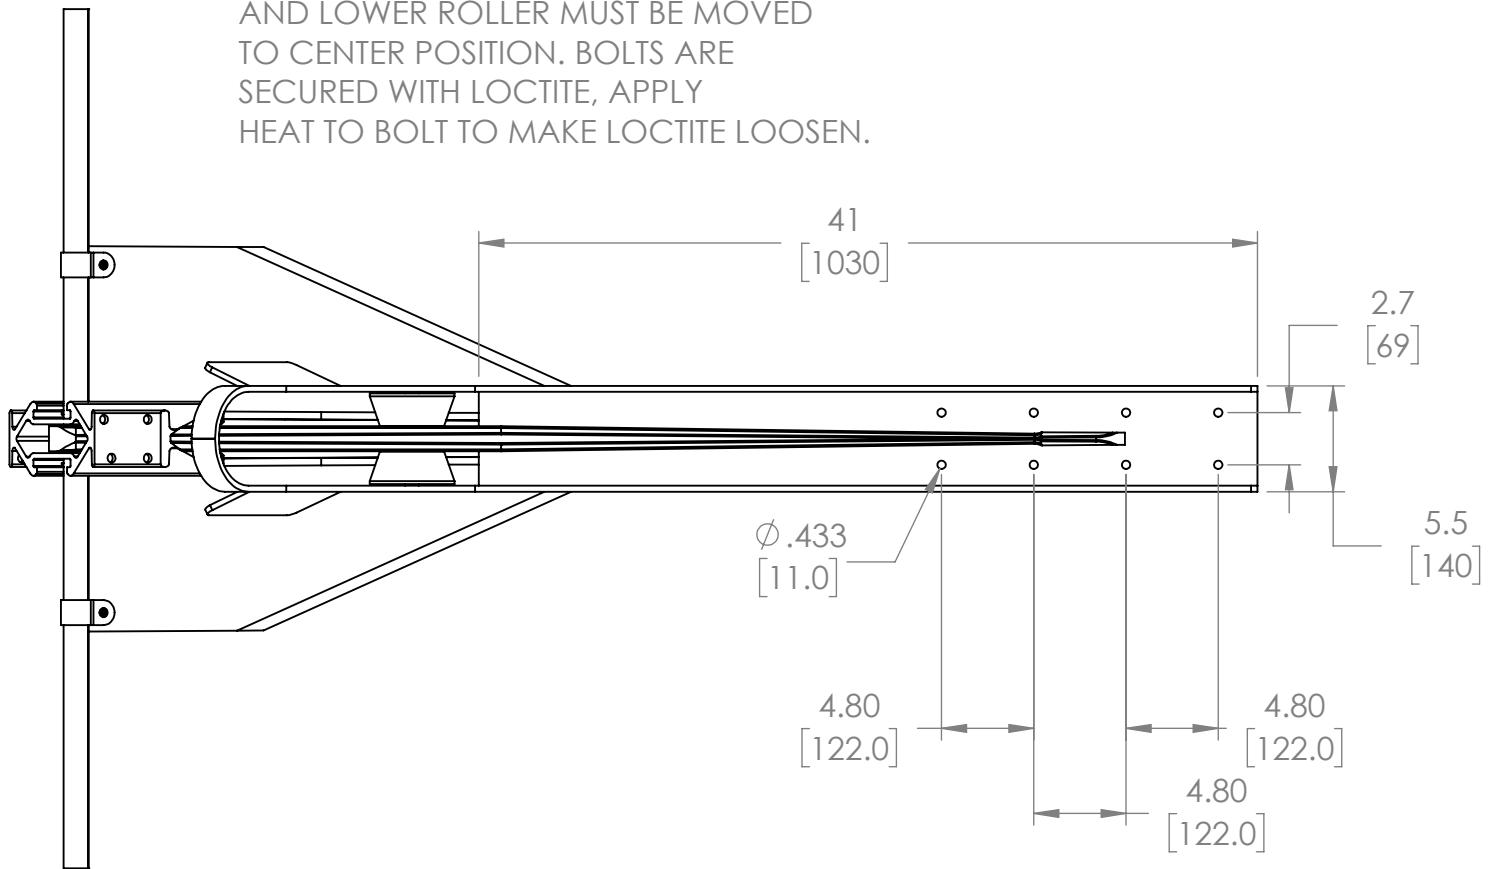

MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES/[MM] .XXX .XX ANGLES ± ± ± 1/2			ANCHORLIFT WINDLASS SYSTEMS	
				FORTRESS MARINE ANCHORS	
FINISH				TITLE ANCHORLIFT 90130 FORTRESS FX125	
				SIZE DWG. NO. 90130-FX125	
DO NOT SCALE DRAWING	DRAWN BY DATE CHECKED - -			SCALE: 1:10	REV. A
					SHEET 1 OF 1